

Casolux Marine light

Marine light system

CLEO

GB

IP65		Power 0,6 w	Efficiency 15 Lm/w	Lifetime 35.000 Hours (70% Lumen maintenance)	Input 10-32 VDC	Material Stainless steel	CE
------	---	----------------	-----------------------	---	--------------------	-----------------------------	----



CLEO ROUND (RO)




CLEO SQUARE (SQ)




CLEO ROUND 25° (RO25)



CLEO SQUARE 34° (SQ34)



Side

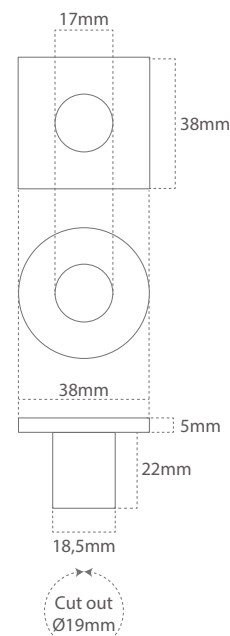

Back (RO)

Back (SQ)

Mounting bracket

Product code	Front Colour/Quality	IP	Lumen	Beam	Power	Volt	CCT	CRI
CLEO-BL-SS-RO	Black painted SS	IP65	9	65°	0,6 W	10-32 VDC	3000 K	> 85
CLEO-SS-RO	SS	IP65	9	65°	0,6 W	10-32 VDC	3000 K	> 85
CLEO-SS-RO25	SS	IP65	9	25°	0,6 W	10-32 VDC	3000 K	> 85
CLEO-SS-RO25-2700	SS	IP65	9	25°	0,6 W	10-32 VDC	2700 K	> 85
CLEO-SS-SQ	SS	IP65	9	65°	0,6 W	10-32 VDC	3000 K	> 85
CLEO-SS-SQ34	SS	IP65	9	34°	0,6 W	10-32 VDC	3000 K	> 85

Feature

- Courtesy and orientation lighting.
- Stainless steel ensures corrosion free product in damp environment.
- IP65 design sealed to withstand moisture.

Material

- Front: SS316L Stainless steel
- Plastic mounting module
- Plastic mounting bracket with 3M VHB Tape

Benefit

- High reliability
- Maintenance free

Application

- Marine light

